



EDF/F (economic ball torque limiter): technical data

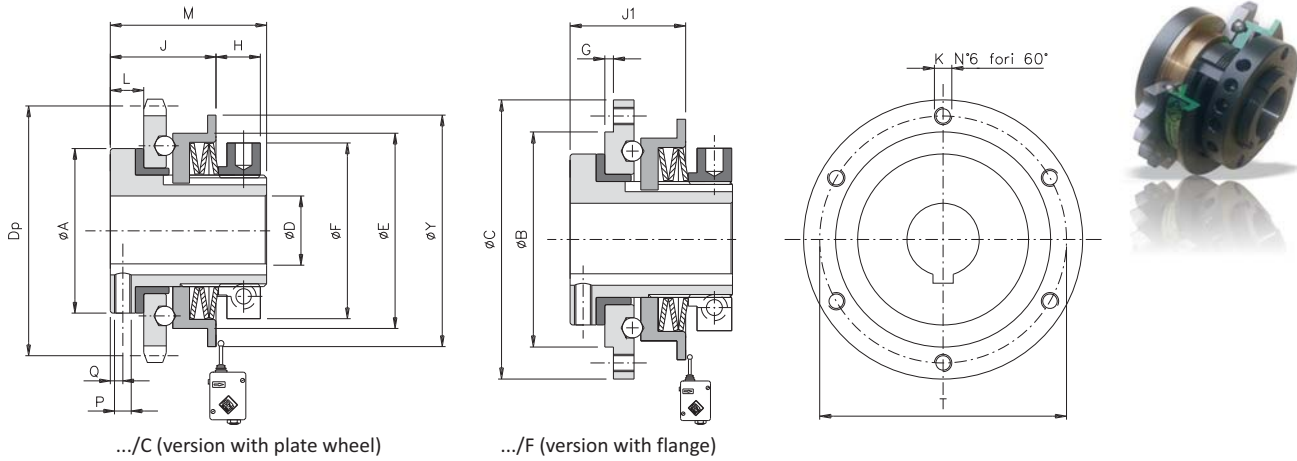

DIMENSIONS AND TECHNICAL DETAILS

Size	Torque [Nm]	A	B h7	C	D H7		E	F	G	J1	K	L	M	P	Q	T	Y	Standard platewheel			Max. speed [Rpm]	Weight [Kg]
					Pilot bore	max.												lead	Dp	J		
00.38	7,5 - 30	30	35	52	-	12	38	35	1	21	M4	6	33	M3	2	44	48	3/8" Z16	48,82	20,5	1900	0,2
0.50	8 - 70	40	50	68	-	20	50	42	1,5	26	M5	8	42	M4	3	58	63	3/8" Z20	60,89	24,5	1400	0,5
1.70	15 - 155	59	65	90	-	25	70	63	2	36	M5	11	55	M6	4	80	83	1/2" Z22	89,24	34	1200	1,3
2.90	35 - 320	72	85	112	-	38	90	82	2	40	M6	12	61	M6	4,5	100	103	3/4" Z18	109,71	40	1000	2,4
3.115	50 - 580	89	110	140	18	45	115	104	2	51	M8	14	71	M6	5,5	125	128	1" Z17	138,22	53	800	4,1
4.140	180 - 1450	104	135	174	24	55	140	128	2	57,5	M10	15	86	M8	5,5	155	153	1" Z20	162,38	58,5	650	6,9

.../TAC (version with chain coupling): technical data

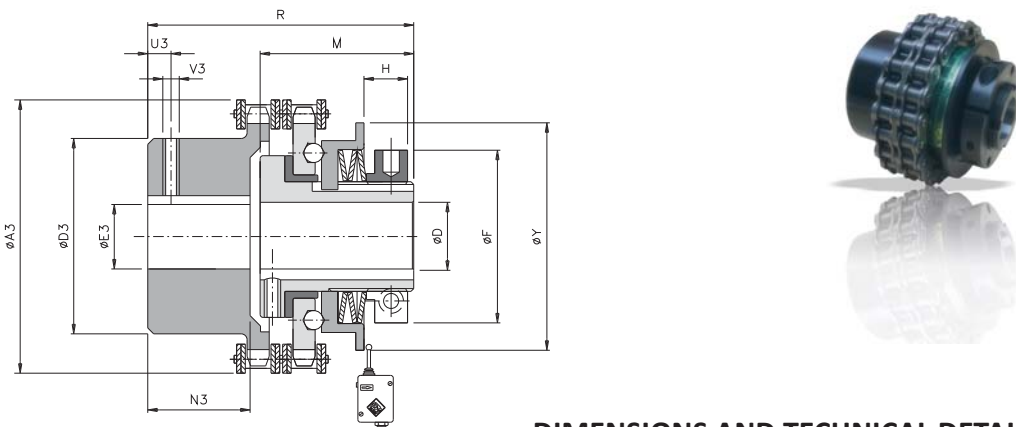

DIMENSIONS AND TECHNICAL DETAILS

Size	Torque [Nm]	D H7		F	Y	M	R	A3	D3	E3 H7		N3	U3	V3	Max. speed [Rpm]	Weight [Kg]
		Pilot bore	max.							Pilot bore	max.					
00.38	7,5 - 30	-	12	35	48	33	60	58	37	10	20	20	5	M3	1900	0,6
0.50	8 - 70	-	20	42	63	42	67	75	50	12	28	19	8	M4	1400	1,0
1.70	15 - 155	-	25	63	83	55	91	101	70	16	38	29	8	M4	1200	2,9
2.90	35 - 320	-	38	82	103	61	107	126	89	20	55	38	12	M6	1000	6,1
3.115	50 - 580	18	45	104	128	71	136	159	112	20	70	56,5	12	M6	800	9,5
4.140	180 - 1450	24	55	128	153	86	156	184	130	28	80	59,5	15	M8	650	20

NOTES

- ⊗ **Technical details:** data is relevant to the whole group (EDF/F – EDF/F/TAC).
- ⊗ **Technical details:** weights are relevant to the whole group pilot bore (EDF/F – EDF/F/TAC).